


KYTOLA FLOWMETERS

MODEL L

1st February 1996 (Issue No. 8)

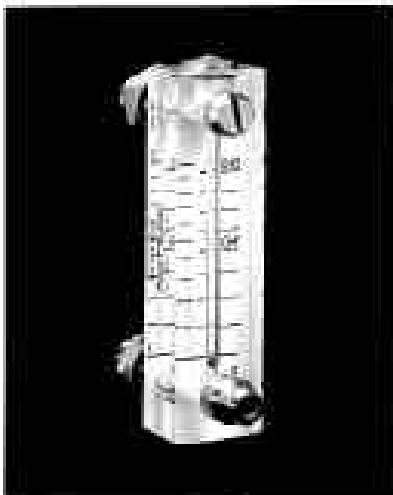

SPECIFICATIONS

Accuracy : +/- 10% of range
 Repeatability : 1.0% of reading
 Pressure Drop : Dependent on range - available on request
 Operating Pressure : 30 Bar (435 PSI)
 Operating Temperature : 75°C (165°F)

OPTIONS

- Calibration for non-standard gases or liquids
- Special scale markings or ranges
- Connection adapters
- Hand adjustable valve
- Viton O-ring seals

Model	Range			Scale
--------------	--------------	--	--	--------------

LH
LR
LT

Flowtube - Acrylic
Flowtube - Grilamid TR 55
Flowtube - Trogamid T

4K
4A
4B
4C

Water ml/min	Air ln/min
10	0.7
30	1.2
50	1.8
80	2.5

5K
5A
5B
5C
8M
8P
8R

l/min	ln/min
0.1	6.0
0.2	7.0
0.3	10
0.5	14
1.0	30
1.6	50
3.0	100

A
R
D

l/min Water (ml/min Water)
ln/min Air
Relative Scale 1 - 10

H
R
V
O

Hand Knob
1/4" BSPT Connection
Viton Seals
Without Valve

Price £ Flowmeter		Price £ Options	
LH	69.60	Hand Knob	8.30
LT	84.70	Viton Seals	6.15
LR	84.70		

